

DATA SHEET: TEMBREAK 2 S160-SF MCCB

MCCB Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN.1, NEMA AB-1

Frame Reference	Quantity	Unit	Condition	TB2 Lite 160
Max in (A) of Frame				160
Model				S160
Number of Poles				3, 4
Type				SF
Nominal current ratings				
	I_n	(A)	50°C	16,20,25,32 40,50,63,80, 100,125,160
Electrical characteristics				
Rated operational voltage	U_e	(V)	AC 50/60 Hz DC	690 250
Rated insulation voltage	U_i	(V)		690
Rated impulse withstand voltage	U_{imp}	(kV)		8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC	6
			525V AC	10
			440V AC	25
			400/415V AC	40
			220/240V AC	50
250V DC	25			
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC	3
			525V AC	7.5
			440V AC	13
			400/415V AC	20
			220/240V AC	25
250V DC	13			
Rated breaking capacity (NEMA)		(kA)	480V AC 240VAC	10 50
Protection				
Fixed thermal, fixed magnetic				■
Adjustable thermal, fixed magnetic				-
Utilisation category				A
Installation				
Front connection (FC)				■
Extension bar (FB)				●
Cable clamp (FW)				-
Rear connection (RC)				●
Plug-in (PM)				-
DIN rail mounting (DA)				●
Dimensions	height	(mm)		130
	width	(mm)	3 pole, (1 pole) 4 pole	75 100
Weight	depth	(mm)		68
	weight	(kg)	3 pole, (1 pole) 4 pole	0.8 1.0
Operation				
Direct Opening Action				■
Toggle operation				■
Door mounted (HS) / Breaker mounted handle (HB)				●
Motor operation				-
Endurance	Electrical	cycles cycles	415V AC	10,000 ^① 20,000

■ Standard ● Optional - Not Available


① 14,000 ≤ 125A

DATA SHEET: TEMBREAK 2 S160-SF MCCB


Outline Dimensions S160-SF

ASL: Arrangement Standard Line h_t : Handle Frame Centre Line C : Handle Centre Line

Front connected

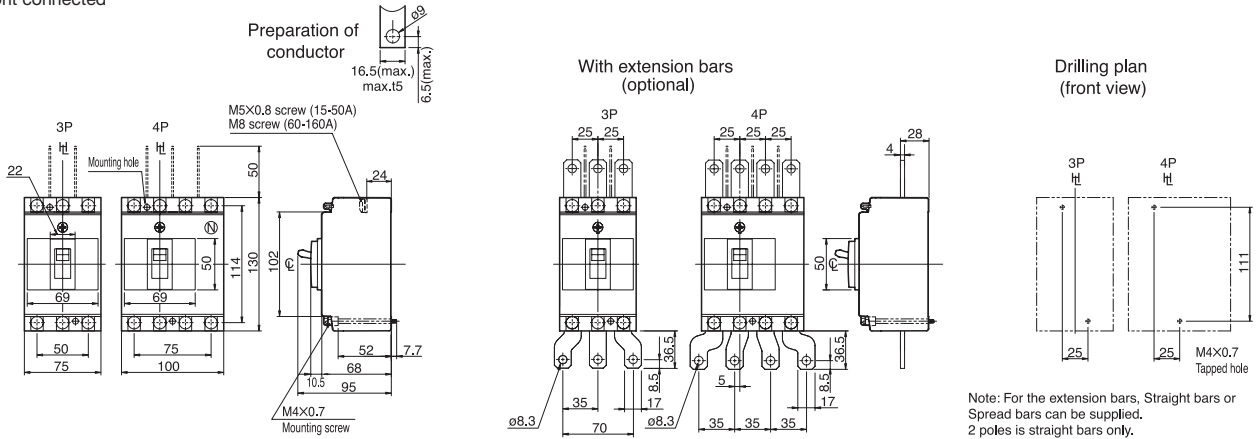

Rear connected

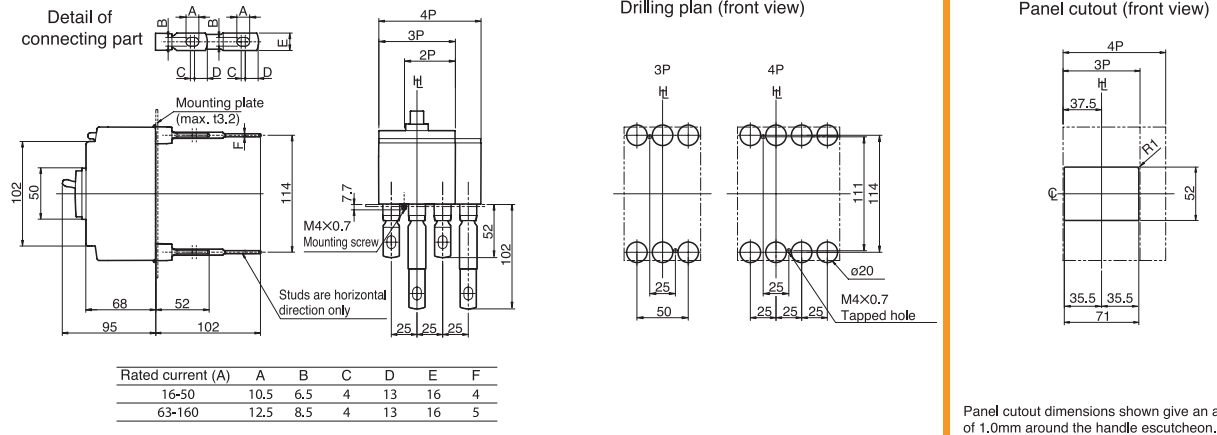

Panel cutout dimensions shown give an allowance of 1.0mm around the handle escutcheon.

DATA SHEET: TEMBREAK 2 S160-SF MCCB

Time/Current Characteristic Curves S160-SF

