

DATA SHEET: TEMBREAK 2 S400-ND MCCB FOR USE ABOVE 250V DC

MCCB Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN.1,

Frame reference	Quantity	Unit	Condition	TB2 E/S 630
Max In (A) of Frame				400
Model				S400
Number of Poles				3
Type				ND
Nominal current ratings				
	I_n	(A)	50°C	250,400
Electrical characteristics				
Rated insulation voltage	U_i	(V)	AC 50/60 Hz	800
Rated impulse voltage	U_{imp}	(kV)		8
Ultimate breaking capacity (IEC, JIS)	I_{cu}	(kA)	1000V DC①② 750V DC①② 600V DC①② 500V DC①② 350V DC①②	- - 15 15 20
Service breaking capacity (IEC, JIS)	I_{cs}	(kA)	1000V DC①② 750V DC①② 600V DC①② 500V DC①② 350V DC①②	- - 15 15 20
Protection				■
Fixed thermal, fixed magnetic Adjustable thermal, fixed magnetic Magnetic trip only (adjustable)				■
Installation				
Front connection (FC) Extension bar (FB) Rear connection (RC) Plug-in (PM) DIN rail mounting (DA) Dimensions	height width	(mm) (mm)	3 pole 4 pole	■ • • - - 260 140
Weight	depth weight	(mm) (kg)	3 pole 4 pole	- 103 4.2 -
Operation				
Direct Opening Action Toggle operation Breaker mounted (HB) Door mounted (HS) Motor operation				■ ■ • • •
Endurance	Electrical	cycles	1000V DC 750V DC 350 - 600V DC	- - 1,000
	Mechanical	cycles	-	4,000


① Connect all poles in series when over DC250V

② The time constant (L/R) of the circuit should be less than 2.0ms nearby rated current less than 5ms for short circuit < 10kA less than 10ms for short circuit < 20kA less than 15ms for short circuit > 20kA

DATA SHEET: TEMBREAK 2 S400-ND MCCB FOR USE ABOVE 250V DC

Outline Dimensions S400-ND

ASL: Arrangement Standard Line Ht: Handle Frame Centre Line

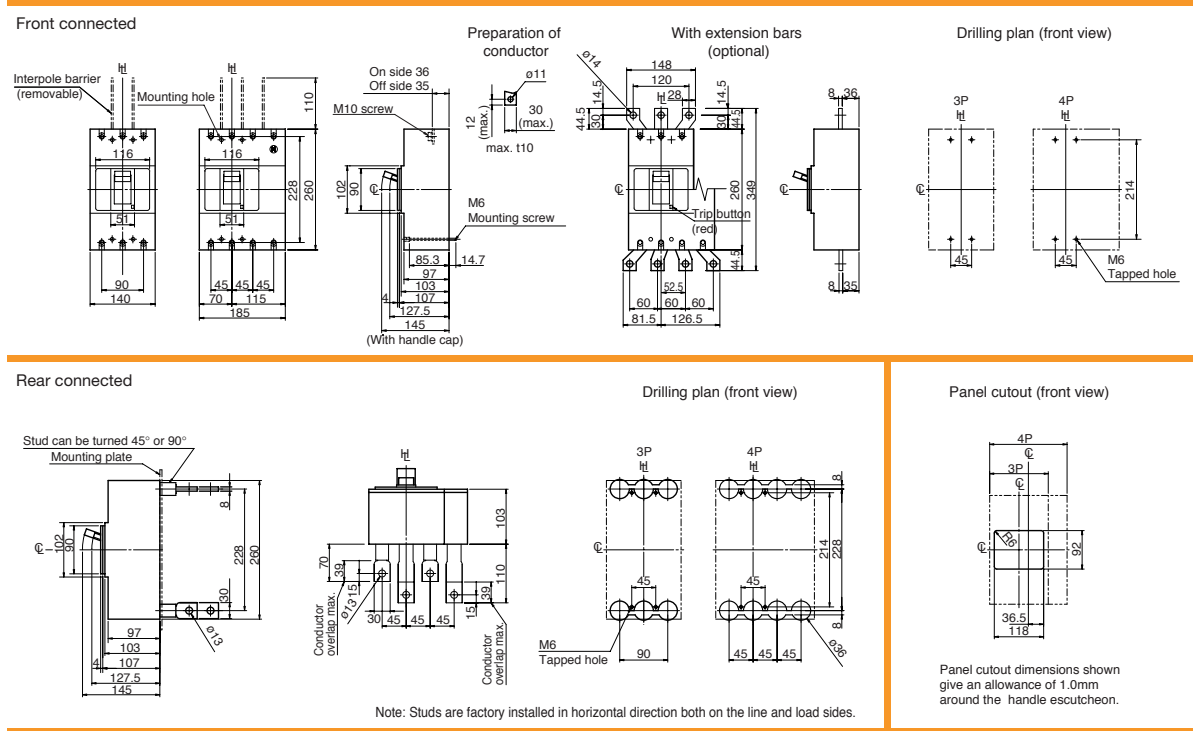

DATA SHEET: TEMBREAK 2 S400-ND MCCB FOR USE ABOVE 250V DC

Time/Current Characteristic Curves
S400-ND

