

DATA SHEET: TEMBREAK 2 L800-NE MCCB

MCCB Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN.1, AS/NZS 3947-2, NEMA AB-1

| Frame reference | Quantity | Unit | Condition | TB2 H/L 800 |
|--|--------------------------|------------------|--|---|
| Max In (A) of Frame | | | | 800 |
| Model | | | | L800 |
| Number of Poles | | | | 3, 4 |
| Type | | | | NE |
| Nominal current ratings | | | | |
| | I_n | (A) | 50°C | 630 800 |
| Electrical characteristics | | | | |
| Rated operational voltage | U_e | (V) | AC 50/60 Hz DC | 690 - |
| Rated insulation voltage | U_i | (V) | | 800 |
| Rated impulse withstand voltage | U_{imp} | (kV) | | 8 |
| Ultimate breaking capacity (IEC, JIS, AS/NZS) | I_{cu} | (kA) | 690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC | 25 ^③ 45 180 200 200 - |
| Service breaking capacity (IEC, JIS, AS/NZS) | I_{cs} | (kA) | 690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC | 20 ^③ 34 135 150 150 - |
| Rated breaking capacity (NEMA) | | (kA) | 480V AC 240V AC | 45 200 |
| Rated short-time withstand current | I_{cw} | (kA) | 0.3 Seconds | 10 |
| Protection | | | | |
| Adjustable thermal, adjustable magnetic | | | | ■ |
| Fixed thermal, fixed magnetic | | | | |
| Microprocessor | | | | |
| Utilisation category | | | | B |
| Installation | | | | |
| Front connection (FC) | | | | - |
| Extension bar (FB) | | | | ■ |
| Cable clamp (FW) | | | | - |
| Rear connection (RC) | | | | • |
| Plug-in (PM) | | | | • |
| DIN rail mounting (DA) | | | | - |
| Dimensions | height | (mm) | | 273 |
| | width | (mm) | 3 pole 4 pole | 210 280 |
| | depth | (mm) | | 140 |
| Weight | weight | (kg) | 3 pole 4 pole | ① ② |
| Operation | | | | |
| Direct Opening Action | | | | ■ |
| Toggle operation | | | | ■ |
| Door mounted (HS) / Breaker mounted handle (HB) | | | | • |
| Motor operation (MC) | | | | • |
| Endurance | Electrical Mechanical | | 690V AC | 4,000 10,000 |
| | | cycles cycles | | |

① 13.3kg 630A, 14.8kg 800A

② 16.8kg 630A, 18.8kg 800A


③ MCCB cannot be used in IT systems at this voltage

■ Standard • Optional - Not Available

DATA SHEET: TEMBREAK 2 L800-NE MCCB

Time/Current Characteristic Curves

L800-NE

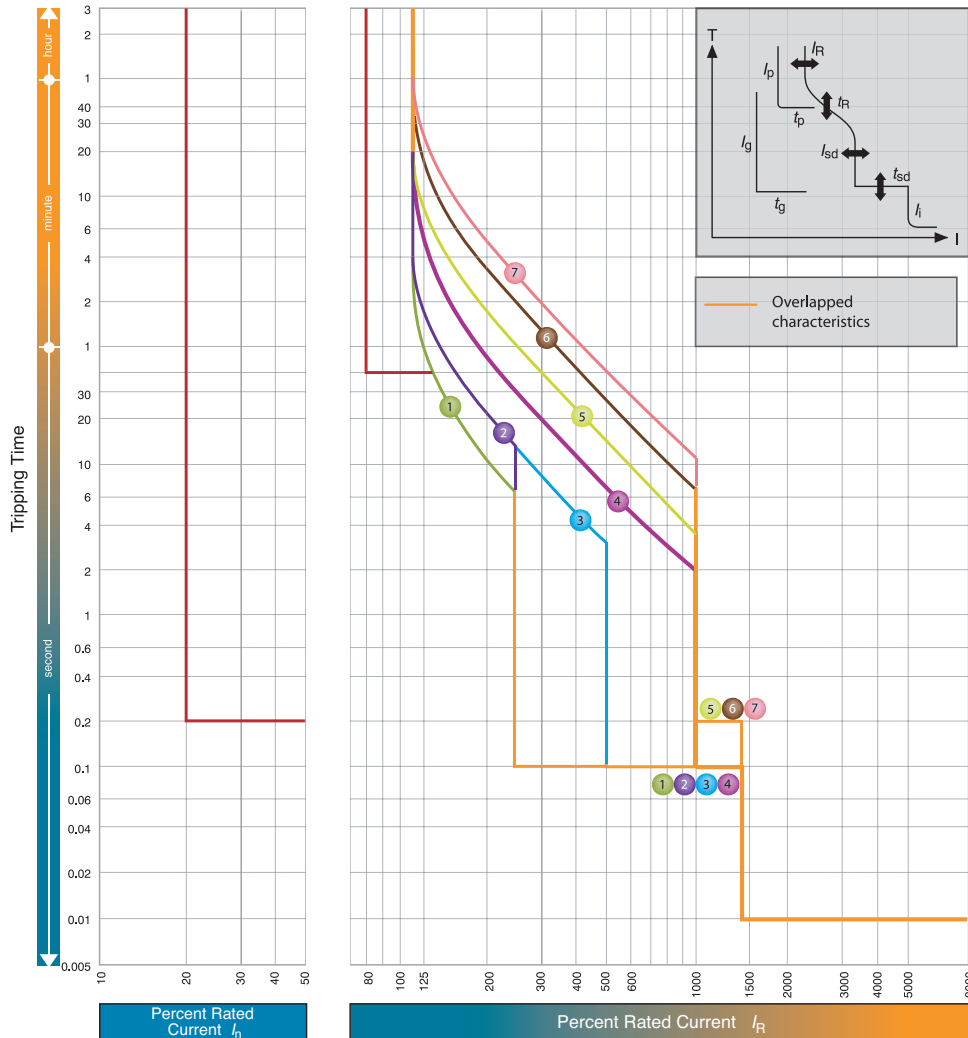

$I_n = 800A; 630A$

| | | I_R (A) | | | | | | | | | |
|----------|-----------------|---------------------|------------------------------------|-----------------|-----|-----|------|-----|-----|------|-----|
| | | LTD Pick-up current | I_R | x/I_n | 0.4 | 0.5 | 0.63 | 0.8 | 0.9 | 0.95 | 1.0 |
| Standard | Characteristics | No. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | | |
| | LT | t_R (s) | 11 | 21 | 21 | 5 | 10 | 19 | 29 | | |
| | ST | I_{sd} | x/I_R | 2.5 | | 5 | 10 | | | | |
| | | t_{sd} (s) | | 0.1 | | | | 0.2 | | | |
| INST | I_i | x/I_n | 14(Max: $12 \times I_n$) Note (1) | | | | | | | | |
| Option | PTA | I_p | x/I_R | 0.8 | | | | | | | |
| | | t_p (s) | | 40 | | | | | | | |
| | GF Note(3) | I_g | x/I_n | 0.2 | | | | | | | |
| | | t_g (s) | | 0.2 | | | | | | | |
| | NP | I_N | x/I_R | 1.0/0.5 Note(2) | | | | | | | |
| | t_N (s) | | $t_N = t_R$ | | | | | | | | |

Note

(1) I_i max. = $12 \times I_n$. (2) $1.0 \times I_R$ or $0.5 \times I_R$ can be selected. Characteristic of neutral protection (t_N vs. I_N) is identical to characteristic of phase protection (t_R vs. I_R). (3) When you specify GF on MCCBs with 3 poles the terminal block is automatically fitted to connect with the external neutral CT for 3 phases 4 wires system.