

DATA SHEET: TEMBREAK 2 S250-GE MCCB

MCCB Electrical Characteristics to IEC 60947-2, EN 60947-2, JIS C 8201-2-1 ANN.1, AS/NZS 3947-2, NEMA AB-1

Frame Reference	Quantity	Unit	Condition	TB2 S/H/L 250
Max In (A) of Frame				250
Model				S250
Number of Poles				3,4
Type				GE
Nominal current ratings				
	I_n	(A)	50°C	40 125 160 250
Electrical characteristics				
Rated operational voltage	U_e	(A)	AC 50/60 Hz DC	690 -
Rated insulation voltage	U_i	(V)		800
Rated impulse withstand voltage	U_{imp}	(kV)		8
Ultimate breaking capacity (IEC, JIS, AS/NZS)	I_{cu}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC	7.5 25 50 65 85 -
Service breaking capacity (IEC, JIS, AS/NZS)	I_{cs}	(kA)	690V AC 525V AC 440V AC 400/415V AC 220/240V AC 250V DC	7.5 25 25 36 85 -
Rated breaking capacity (NEMA)		(kA)	480V AC 240V AC	25 65
Protection				
Adjustable thermal, adjustable magnetic Fixed thermal, fixed magnetic Microprocessor Utilisation category				■ A
Installation				
Front connection (FC) Extension bar (FB) Cable clamp (FW) Rear connecton (RC) Plug-in (PM) Din rail mounting (DA) Dimensions	height width	(mm) (mm)	3 pole, (1 pole) 4 pole	■ ● ● ● ● ● ** -
Weight	depth weight	(mm) (kg)	3 pole, (1 pole) 4 pole	165 105 140 103 2.3 3.1
Operation				
Direct Opening Action Toggle operation Door mounted (HS) / breaker mounted handle (HB) Motor operation (MC)				■ ■ ● ●
Endurance	Electrical Mechanical	cycles cycles	415V AC	30,000 30,000

■ Standard ● Optional - Not Available


** Max. rating 200A for Plug-in

DATA SHEET: TEMBREAK 2 S250-GE MCCB


Outline Dimensions S250-GE

ASL: Arrangement Standard Line HL: Handle Frame Centre Line

Front connected

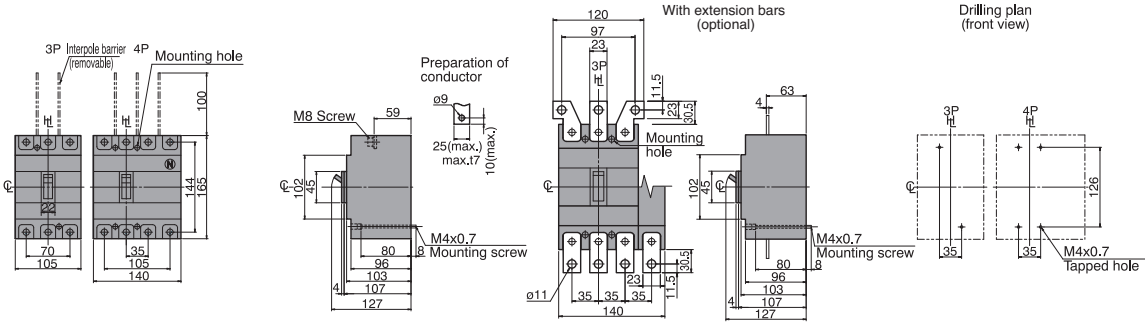


Rear connected

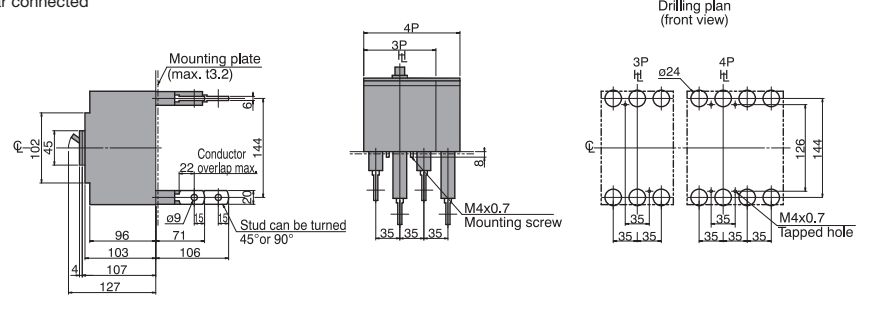


Panel cutout dimensions shown give an allowance of 1.0mm or more around the handle escutcheon.

Front connected with Motor Operator

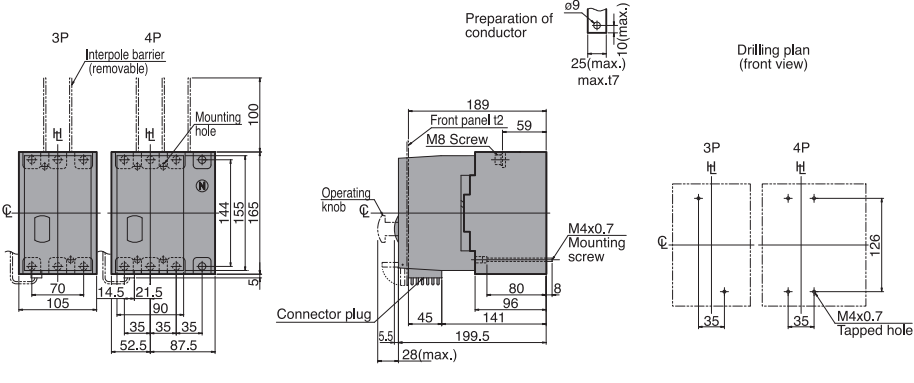

Panel hinge position (hatching area) bottom view

Rear connected with Motor Operator

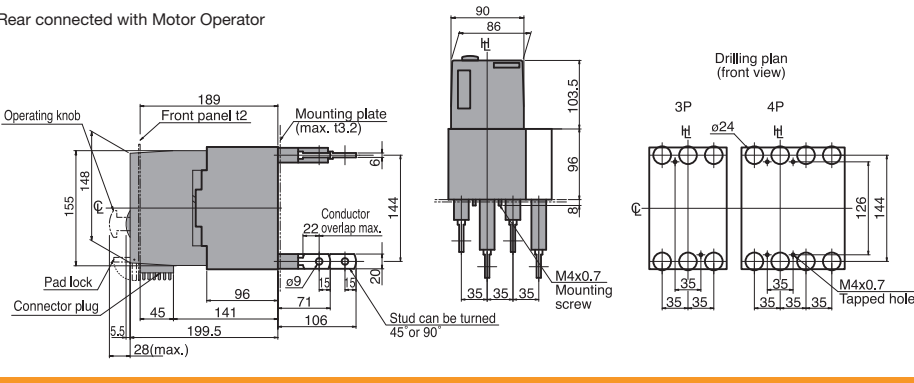


Panel cutout dimensions shown give an allowance of 1.5mm around the handle escutcheon.

DATA SHEET: TEMBREAK 2 S250-GE MCCB

Outline Dimensions S250-GE Plug-in Version


ASL: Arrangement Standard Line H_L: Handle Frame Centre Line

Outline Dimensions

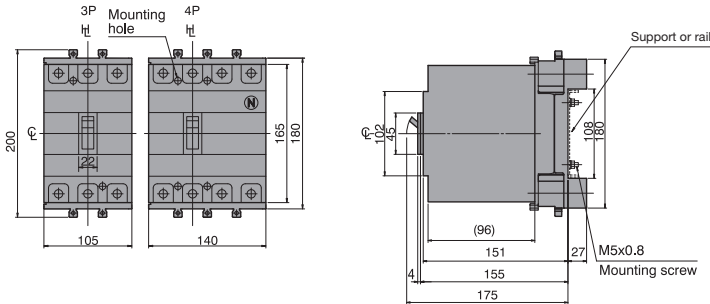


Termination of Busbar


Preparation of conductor

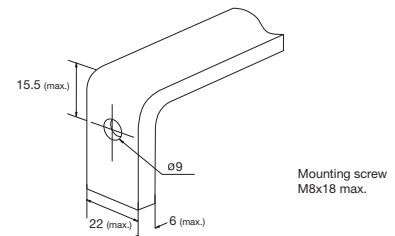


Mounting on a support or rails (shown with optional connection bars oriented for rear access)

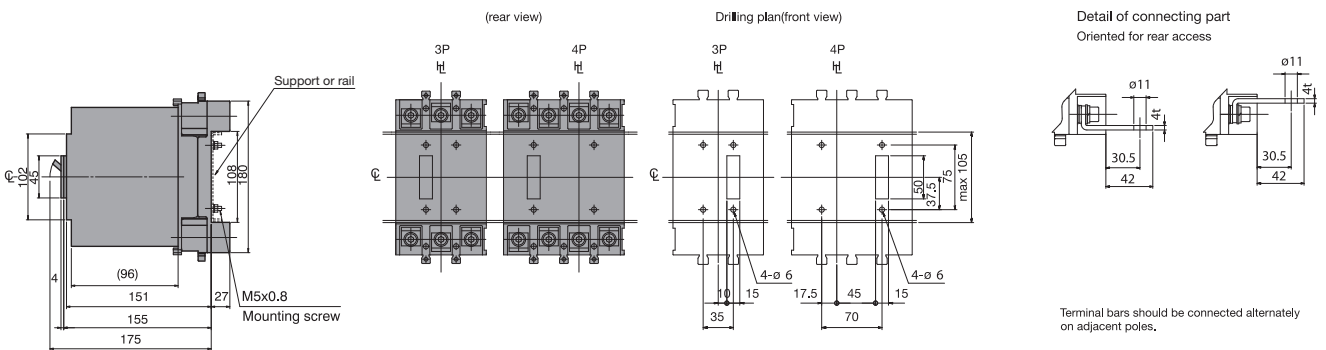

Mounting through the backplate (shown with optional connection bars oriented for rear access)

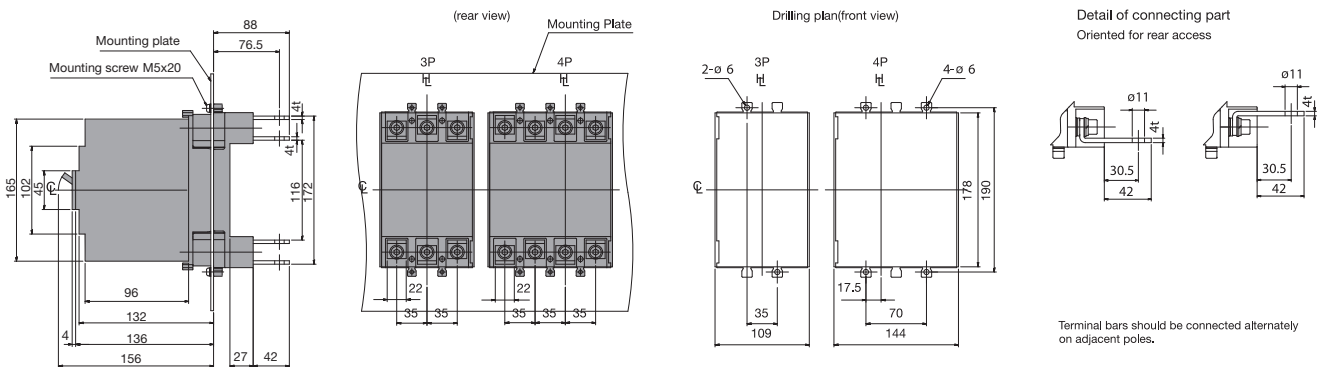


Mounting on the backplate (optional connection bars must be oriented for front access)

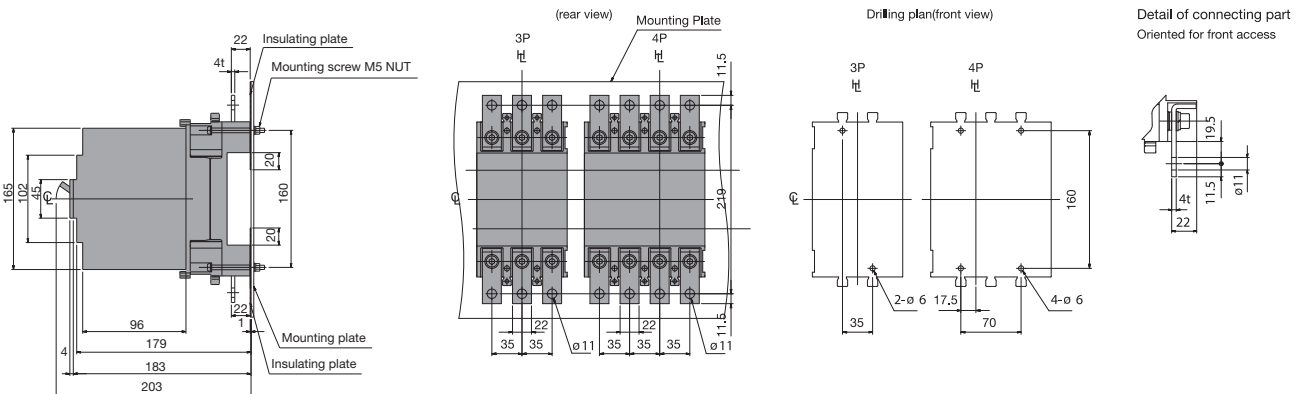

DATA SHEET: TEMBREAK 2 S250-GE MCCB

Time/Current Characteristic Curves

S250-GE

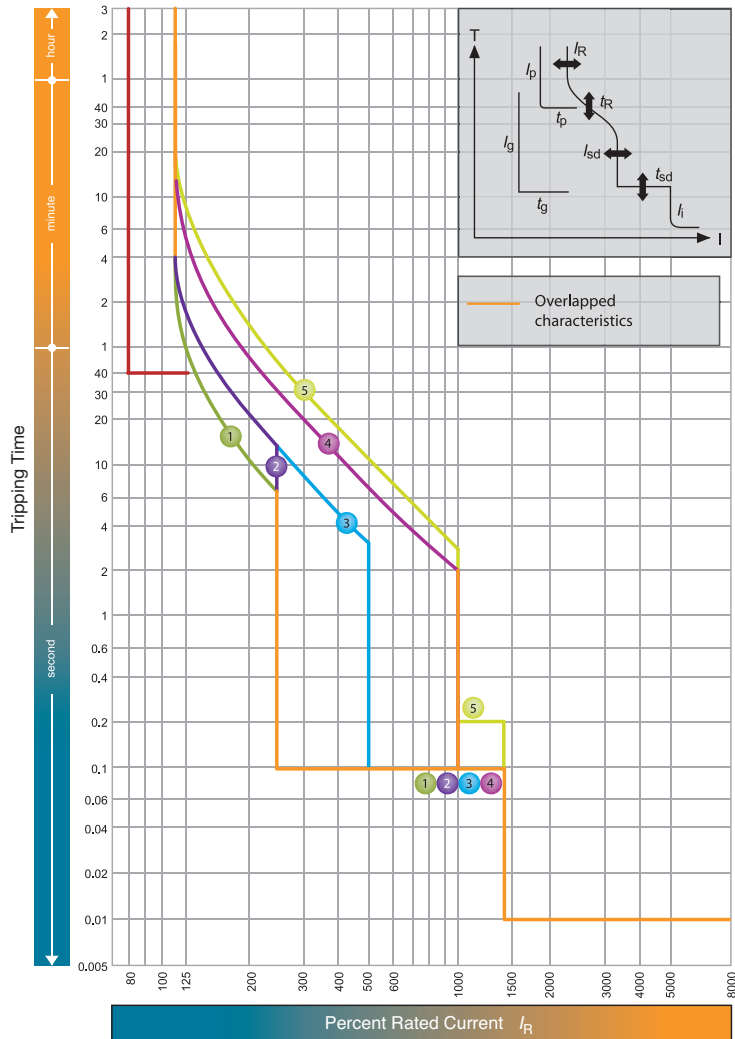

$I_n = 250A; 160A; 125A; 40A$ Note(1)

I_R (A)									
LTD Pick-up current	I_R	x/n	0.4	0.5	0.63	0.8	0.9	0.95	1.0

Characteristics		No.	1	2	3	4	5
Standard	LT	t_R (s)	11	21	21	5	7.5
	ST	I_{sd}	2.5		5	10	
		t_{sd} (s)	0.1				
INST	I_i	x/ I_n	14(Max: 13 x I_n) Note (2)				
Option	PTA	I_p	0.8				
		t_p (s)	40				
	NP	I_N	x/ I_n	1.0 Note (3)			
t_N (s)			$t_N = t_R$				

Note

(1) For Plug-in (PM), max. setting for I_R should be less than 225A. When $I_n=250A$, I_R should be $I_n \times 0.9$ or less.

(2) I_i max. = 13 x I_n . (3) Characteristic of neutral protection (t_N vs. I_N) is identical to characteristic of phase protection (t_R vs. I_R).